




Customer P/N:	R614
产品图号 :	MWH08026BK

Version time	Elucidation	Change date	Change
A/1	301增加极性和年轮	2013/11/07	梁晓华
A/2	301更新网尾	2014/03/29	黄培文
A/3	301更新字版	2015/06/29	黄培文
A/4	添加装箱数	2015/06/30	黄培文
A/5	更新301插头	2015/07/15	苏锐华

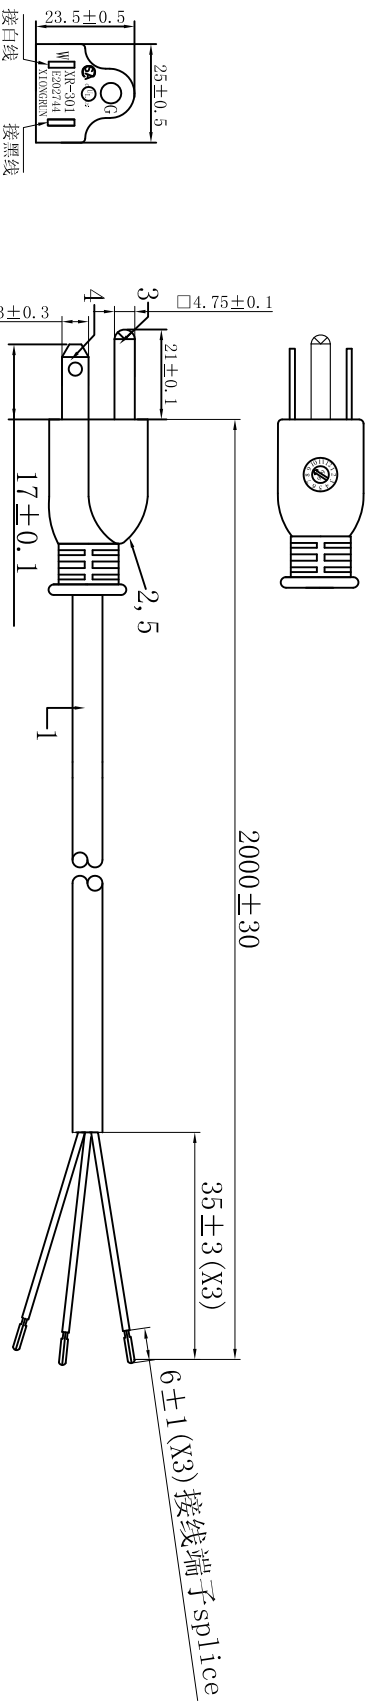

印字内容:凹印, 字轮编号:CY41 wire marking:
 (UL) E218701 SJT 18AWG3C 300V 105°C VW-1 GUANGDONG XTONGRUN
 C(UL) TYPE SJT 3X0.824mm²(18AWG) 300V 105°C E218701 FT2



技术要求:requirement:
 1:耐压测试:外高压4200V/S 内高压1500V/S 漏电流0.5mA.
 2:绝缘阻抗不小于100兆欧.
 3:100%导通OK.
 4:符合ROHS
 5: 80 条 / 箱



广东雄润电业有限公司
 GUANGDONG XTONGRUN ELECTRICAL CO., LTD

6	6.6mm接线端子, 黄铜本色, splice (STS 635BS-0或替代品) *2	DWJXDZ0002T-0	3	EA
5	美式内架 insert	JB301030010	1	EA
4	平头非极性插片 terminal	DA001002ST-1	2	EA
3	□4.75圆管端子 terminal	DYG47507LT-1	1	EA
2	美式三插NEMA 5-15P (XR-301) COLOR:黑色black PVC 30P	BC1030PBK0012	0.02174	Kg
1	SJT 18AWG/3C 105°C COLOR:黑色black 截线长:L=2000mm.	CUSJT3018A00101	2	M
NO.	DESCRIPTION	XTONGRUN PN	QTY	UNIT

DESCRIPTION	AC POWER CABLE	DRAW NO.	SCALE	UNIT	DATE
DESCRIPTION	AC POWER CABLE	DRAW NO.	SCALE	UNIT	DATE
PARTS NO					
APPROVED		CHECKED		DRAWING	