

Schurter Cord Plugs (rewireable) IEC 60320 Plug C14, Rewireable, Straight, max. Cable Diameter 10 mm

Features

- Cord plug (Rewireable)
- Plug, Pin temperature 70°C, Protection Class I
- 1 Function
- Max. wire size: 3 x 1.5 mm² / 3 x 14 AWG
- Suitable for appliances with protection class I acc. to IEC 61140



Ordering Information

Stay Online Item # 2080

Description:
Housing is
Thermoplastic, black
and UL 94V-0

Cord Diameter
10 mm


Schurter Number

4735

21.6



85.5

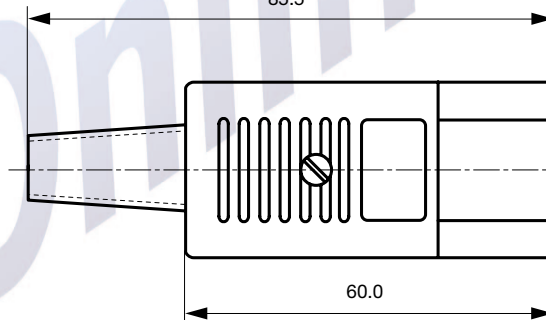

Approvals

- UL File Number: E96454
- VDE Certificate Number: 40011482
- CSA C22.2 no. 42

Specifications

Device Color Black
Housing Thermoplastic

Performance

Electrical
Ratings IEC 10A / 250 VAC; 50 Hz
Ratings UL/CSA 15A / 250 VAC; 60 Hz
Dielectric Strength > 2k VAC between L-N
 > 2k VAC between L-/ N- PE (1 min/50 Hz)

Mechanical

Terminal Cable
Material: Housing Thermoplastic, black, UL 94V-0

Environmental

Allowable Operation Temp. Pin Temperature 70°C
Protection Class Suitable for appliances with protection class I acc. to IEC61140