

**Twist-Lock® Devices**  
**30A, 2 Pole, 3 Wire, 240VAC, Line to Neutral**

# HUBBELL

## Insulgrip® Plug

### Features

- Ribbed nylon housing provides a secure grip and impact and chemical resistance.
- Superior cord grip design protects terminations from excess strain.
- Clear, funnel shaped wire entry for ease of termination.
- Integral, dust shield protects wiring chamber from dust or contaminants.



30A 240V AC  
NEMA L25-30P  
UL/CSA



### Ordering Information



Description	Cord Diameter	UPC Number	Catalog Number
Black and White Nylon	.360" - .930"	783585580289	HBL2601

### Listings

Listed to UL 498  
Fed.Spec. W-C-596  
Certified to CSA C22.2 No.42

### Specifications

Housing/Cord Clamp	Nylon
Terminal Retainer	Clear Polycarbonate
Blades	Brass
Terminal Screws	#10-32 Brass
Assembly Screws	Steel – nickel plated

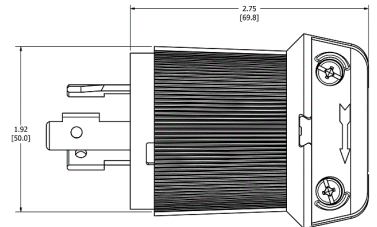

### Performance

#### Electrical

Current Interrupting	Certified at full rated current
Dielectric voltage	2,000V minimum

#### Mechanical

Terminal Accommodation	#16 - #8 AWG stranded
Terminal Identification	Terminals identified in accordance with UL498

#### Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75C Minimum -40C (w/o impact)

### Complementary Products

Connector	HBL2603
Weatherproof Boot	HBL6031
Receptacle	HBL2600

### Online Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

